

QHF-3500-19000-60

3.5~19GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|-----------------------|---------------------------------------------|
| Passband: | 3.5~19GHz |
| Insertion Loss: | 2dB max. @3.5~3.7GHz 1dB max. @3.7~19GHz |
| VSWR: | 1.5 max. |
| Stopband Attenuation: | 60dB min. @DC~3.08GHz |
| Impedance: | 50Ω |
| Average Power: | 15W max. |

Mechanical


| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 41*29*10mm 1.614*1.142*0.394in |
| Weight: | 36g |
| Connectors: | SMA female |
| Mounting: | 4-Φ2.2mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|--------------|-----------|
| Temperature: | -55~+85°C |
|--------------|-----------|

Outline Drawings

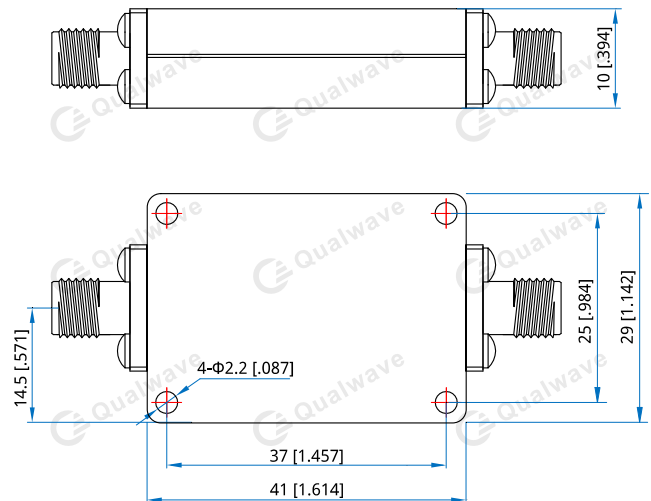

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHF-3500-19000-60

Customization is available upon request.