

QWT28-3K WR-28, 3000W

Features:
* Low VSWR
* Broadband

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching


Electrical

Frequency: 26.3–40GHz
Average Power: 3000W
VSWR: 1.2 max.

Mechanical

Waveguide Size: WR-28 (BJ320)
Flange: FBP320
Finish: Conductive oxidation
Coating: Black paint

Outline Drawings

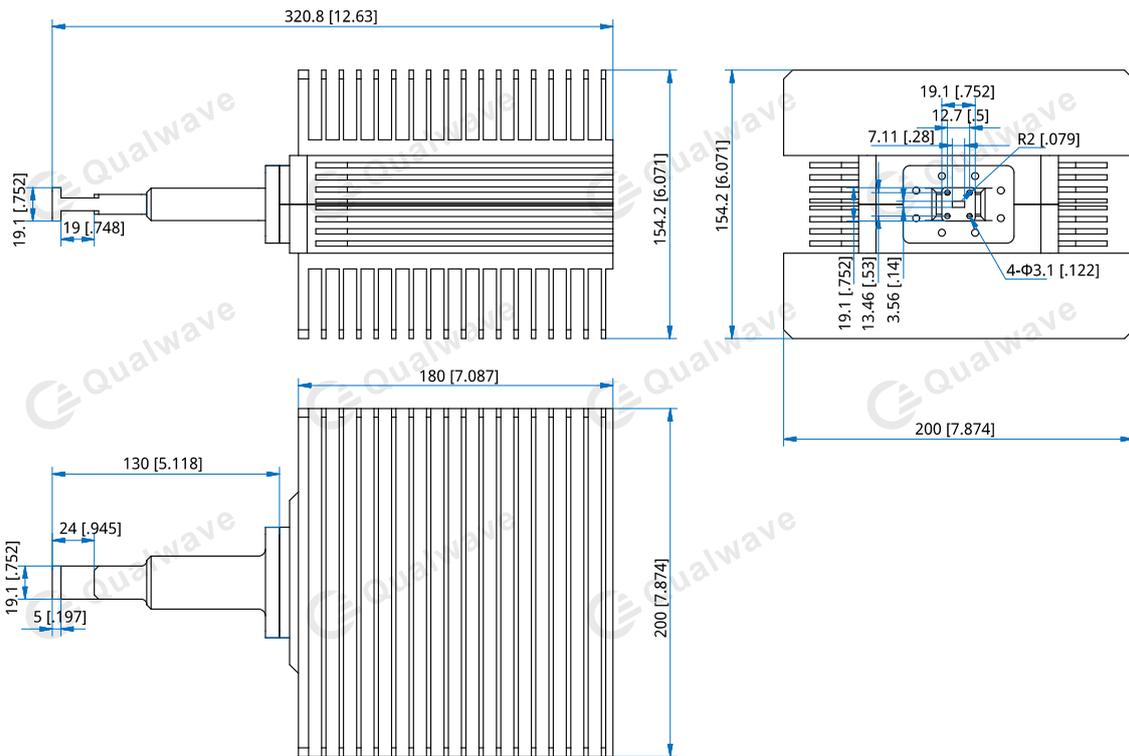

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT28-3K-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP320 (Outline A)

Examples:

To order a high power waveguide termination, WR-28, 3KW, Aluminum, FBP320, specify QWT28-3K-A-1.

Customization is available upon request.