

QLF-2250-60

DC~2.25GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~2.25GHz
Insertion Loss:	1dB max. @DC~2.15GHz 1.5dB max. @2.15~2.25GHz
VSWR:	1.3 max.
Stop Band Attenuation:	60dB@2.65~7.4GHz min.
Average Power:	15W max.
Impedance:	50Ω

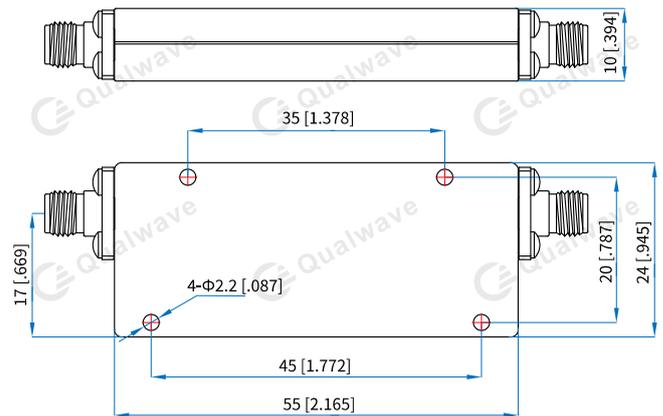
Mechanical

Size*1:	55*24*10mm 2.165*0.945*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QLF-2250-60

Customization is available upon request.