

# QLF-25000-40-1

## DC~25GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~25GHz
Stop Band Attenuation:	40dB@28~40GHz min.
Insertion Loss:	1.5dB max.
VSWR:	1.7 max.
Input Power:	1W max.
Impedance:	50Ω

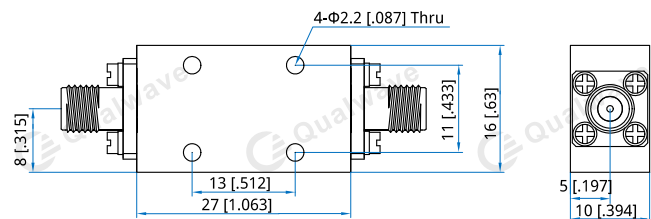
**Mechanical**

Size <sup>*1</sup> :	27*16*10mm 1.063*0.63*0.394in
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-45~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QLF-25000-40-1**

Customization is available upon request.