

QLF-4000-30

DC~4GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~4GHz
Stopband Attenuation:	50dB@4.8~7GHz min. 40dB@7~11GHz min. 30dB@11~12GHz min.
Insertion Loss:	1dB max.
VSWR:	1.7 max.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size*1:	20*23*10mm 0.787*0.906*0.394in
RF Connectors:	SMA Female
Weight:	22g typ.
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

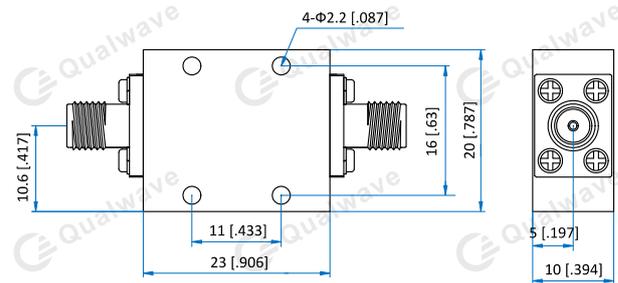

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QLF-4000-30

Customization is available upon request.