

QLF-5500-60

DC~5.5GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~5.5GHz
Pass Band Insertion Loss:	3dB max.
VSWR:	2 max.
Stop Band Attenuation:	60dB@6~20GHz min.
Input Power:	10W max.
Impedance:	50Ω

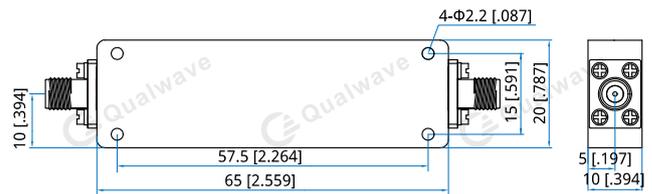
Mechanical

Size*1:	65*20*10mm 2.559*0.787*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole
Weight:	50g typ.

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QLF-5500-60

Customization is available upon request.