

QWT15-R5

WR-15, 0.5W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 49.8~75.8GHz
Average Power: 0.5W
VSWR: 1.08 max.


Mechanical

Waveguide Size: WR-15 (BJ620)
Flange: FUGP620

Environmental

Temperature: -55~+125°C

Outline Drawings

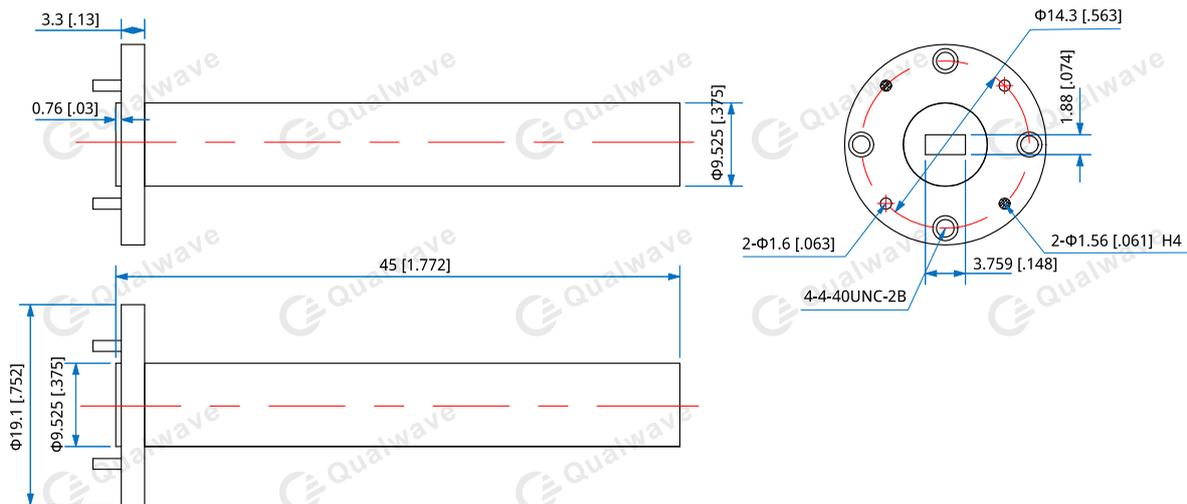

Outline A

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT15-R5-Y-Z

Y: Material

Z: Flange type

Material naming rules:

B - Brass (Outline A)

Flange naming rules:

6 - FUGP620 (Outline A)

Examples:

To order a low power waveguide termination, WR-15, 0.5W, Brass, FUGP620, specify QWT15-R5-B-6.

Customization is available upon request.