

QWT3-R3

WR-3, 0.3W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching

Electrical

Frequency: 217~330GHz
 Average Power 0.3W
 VSWR: 1.25 max.

Mechanical

Interface: WR-3 (BJ2600)
 Flange: FUGP2600
 Material: Gold plated copper

How To Order

QWT3-R3-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


15 - FUGP (Outline A)

Examples:

To order a low power waveguide termination, WR-3, 0.3W, Copper, FUGP2600, specify QWT3-R3-C-15.

Customization is available upon request.

Outline Drawings

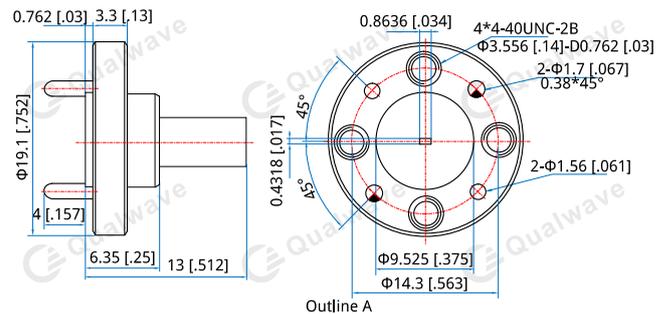

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]