

QWT4-R3

WR-4, 0.3W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching

Electrical

Frequency: 172~261GHz
 Average Power 0.3W
 VSWR: 1.2 max.

Mechanical

Interface: WR-4 (BJ2200)
 Flange: FUGP2200
 Material: Copper

How To Order

QWT4-R3-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


15 - FUGP (Outline A)

Examples:

To order a low power waveguide termination, WR-4, 0.3W, Copper, FUGP2200, specify QWT4-R3-C-15.

Customization is available upon request.

Outline Drawings

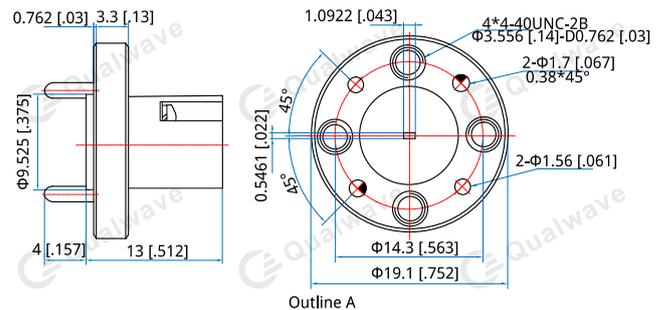

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]