

# QBMT50-2

## 50W

Features:  
 \* Low VSWR  
 \* Broadband

Applications:  
 \* Transmitters  
 \* Antennas  
 \* Laboratory Test  
 \* Impedance Matching

### Electrical

Frequency Range: 0.1~0.715GHz  
 Average Power<sup>\*1</sup>: 50W@25°C  
 VSWR: 4±0.3

[1] Derated linearly to 5W@125°C.

### Mechanical

Size<sup>\*2</sup>: 60\*60\*80mm  
 2.362\*2.362\*3.15in

Connector: N Male

[2] Exclude connectors.

### Environmental


Temperature: -55~+125°C

### How To Order

**QBMT50-100-715-4-N**

Customization is available upon request.

### Outline Drawings

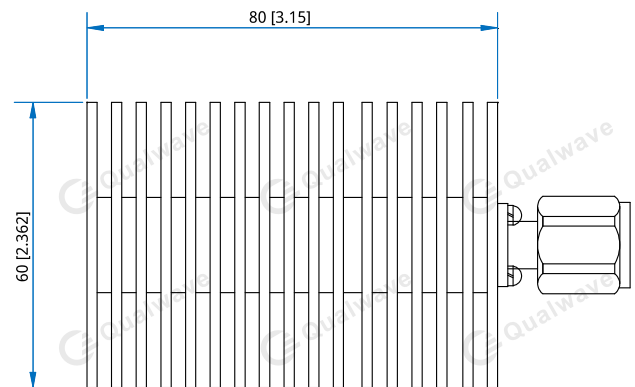

Unit: mm [in]

Tolerance: ±3%

Expain:

If necessary, the product needs to be air-cooled to assist in heat dissipation.