

# QMP2-10700-14500-2

10.7~12.75GHz, 13~14.5GHz

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Transceivers
- \* Instrumentation

**Electrical**

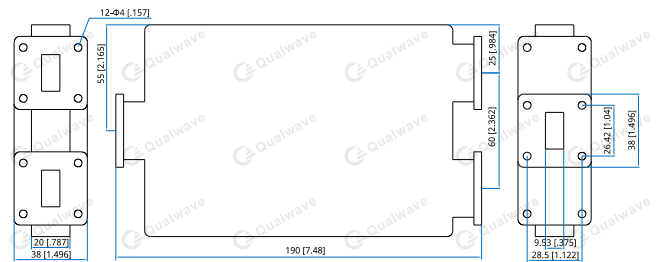
Channel 1 (L):	10.7~12.75GHz
Channel 2 (H):	13~14.5GHz
Passband Insertion Loss:	0.8dB max.
Isolation:	70dB min.
VSWR:	1.3 max.
Input Power:	100W
Impedance:	50Ω

**Mechanical**

Waveguide Size:	WR-75 (BJ120)
Mounting:	12-Φ4mm through-hole

**Environmental**

Operating Temperature:	-40~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**
**QMP2-10700-14500-2**

Customization is available upon request.