

QPA-2110-2170-47-47S

2.11~2.17GHz, 47dB, 47dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	2.11~2.17GHz
Gain:	47dB min.
Gain Flatness:	1±1dB max.
Output Power (Psat):	47dBm min.
Spurious:	-65dBc max.
Harmonic:	-35dBc max.
Voltage:	28V/10A VCC (Reference)
	+31V max.
Input Power:	1±1dB
Input VSWR:	1.7
PTT:	+3.3~5V (On)
Current:	7A max
Protection Function:	80°C protection, Open protection
Impedance:	50Ω

Mechanical

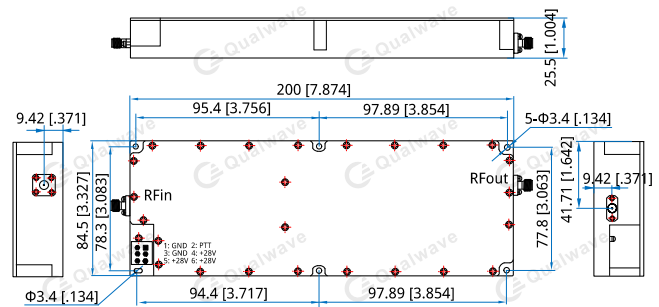
Size ^{*1} :	200*84.5*25.5mm 7.874*3.327*1.004in
Weight:	0.64kg
RF Connectors:	SMA Female
Power Supply Interface ^{*2} :	4.2mm double row 6P female seat
Mounting:	5-Φ3.4mm through-hole

[1] Exclude connectors.

[2] Install heat sink during testing, outputs with isolators; Distribution 5557 connecting cable plug.

Environmental

Operating Temperature: -25~+55°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-2110-2170-47-47S

Customization is available upon request.