

QSLA-19200-21200-55-130

Ka-Band, 19.2~21.2GHz, 55dB, 130K

Features:

- * Broad Band
- * Low Noise Temperature
- * Low Input VSWR

Applications:

- * Fixed Station
- * Mobile Station
- * Laboratory Test

Electrical

Frequency:	19.2~21.2GHz
Gain:	55dB
Gain Flatness:	±1.5dBp-p max.
Gain Variation (within the operating temperature range):	±1.5dB max.
Gain Stability (at constant temperature):	±0.1dB/h, ±0.2dB/24h
Noise Temperature:	130K
Output Power (P1dB):	5dBm min.
Non Damaging Input Power:	0dBm max.
Input/Output VSWR:	2.5/2.0
Spurious:	-60dBc max.
Voltage:	+15V DC (12~18V DC)
Current:	100mA typ.
Impedance:	50Ω

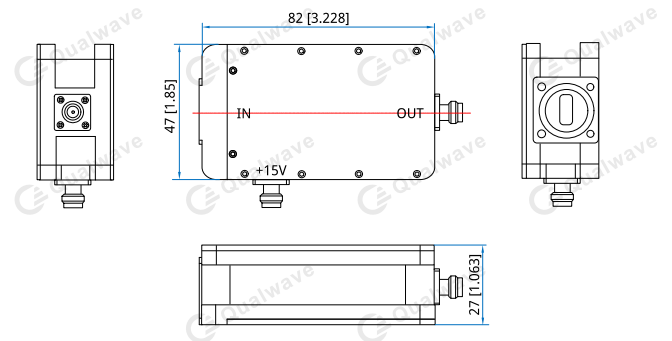
Mechanical

Size*1:	82*47*27mm 3.228*1.85*1.063in
Input Waveguide Size:	WR-42 (BJ220)
Output Connectors:	2.92mm Female or SSMA Female
Flange:	FBM220
Power Supply Interface:	SMA Female
Weight:	220g

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+60°C
Operating Humidity:	5%~100%

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QSLA-19200-21200-55-130-X

X: Output connector type

Connector naming rules:

K - 2.92mm female

A - SSMA female

Examples:

To order a Satcom Low Noise Amplifier, 19.2~21.2GHz, 55dB, 130K, 2.92mm female, specify QSLA-19200-21200-55-130-K.

Customization is available upon request.