

QSDC-0.5-500-5-11.5-S

0.5~500MHz, 5W, 11.5dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~500MHz
Insertion Loss:	1.3dB max.
Coupling:	11.5±0.5dB
Directivity:	15dB min.
VSWR (Mainline):	1.2 max.
Average Power:	5W
Impedance:	50Ω

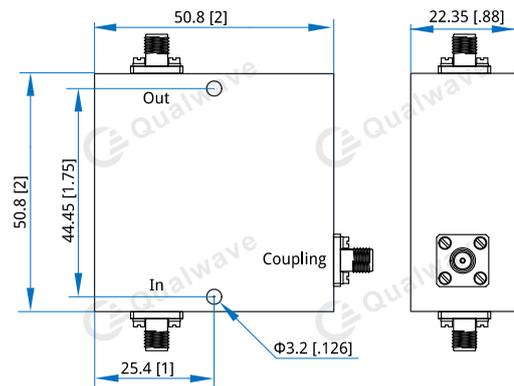
Mechanical

Size* ¹ :	50.8*50.8*22.35mm 2*2*0.88in
Connectors:	SMA female
Mounting:	2-Φ3.2mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-0.5-500-5-11.5-S

Customization is available upon request.