

## QSDC-5600-5800-K1-30-N

5.6~5.8GHz, 100W, 30dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	5.6~5.8GHz
Insertion Loss:	0.4dB max.
Coupling:	30±1dB
Directivity:	10dB min.
VSWR (Voltage):	1.5 max.
Average Power:	100W
Impedance:	50Ω

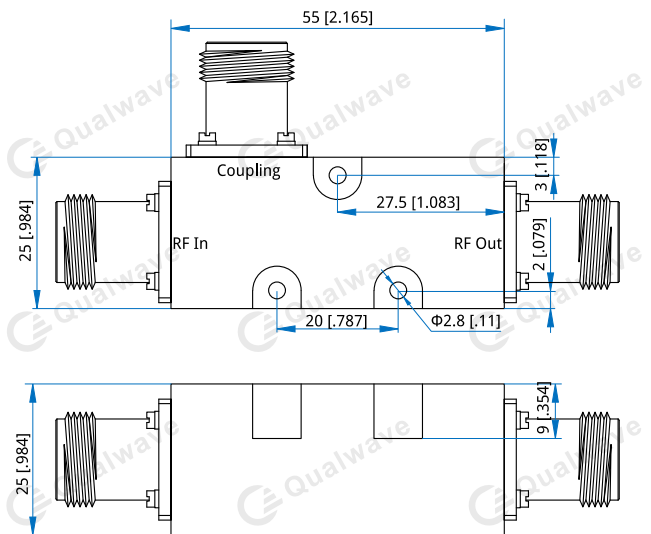
**Mechanical**

Size*1:	55*25*25mm 2.165*0.984*0.984in
Connectors:	N female
Mounting:	3-Φ2.8mm

[1] Exclude connectors.

**Environmental**

Operating Temperature: -40~+85°C

**How To Order**
[QSDC-5600-5800-K1-30-N](#)
**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in].

Customization is available upon request.