

QSDC-800-2500-50-10-S

0.8~2.5GHz, 50W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.8~2.5GHz
Insertion Loss:	0.5dB max.
VSWR:	1.2 max.
Coupling:	10±1dB max.
Coupling Flatness:	±0.7dB max.
Directivity:	20dB min.
Impedance:	50Ω
Average Power:	50W CW

Mechanical


Size ^{*1} :	85*15*11mm 3.346*0.591*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

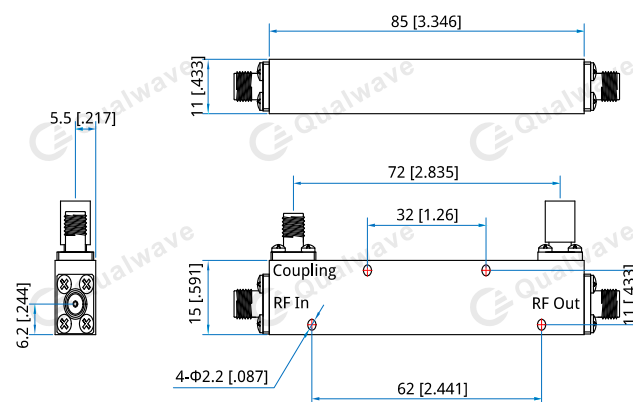

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-800-2500-50-10-S

Customization is available upon request.