

QSMPG-2400-2500-60S

2.4~2.5GHz, 60dBm

Features:

* High Frequency Stability

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	2.4~2.5GHz
Internal Gain:	60dB min.
Gain Flatness:	1±1dB max.
Output Power (Psat):	60±0.09dBm min.
Built-in VCO Sweep:	150KHz (Triangle wave)
Harmonic:	-20dBc max. @100W
Voltage:	220V
Power Consumption:	1300W max.
PTT:	Default closed, press to open
Protection Function:	Over 80°C protection Open circuit protection
Impedance:	50Ω

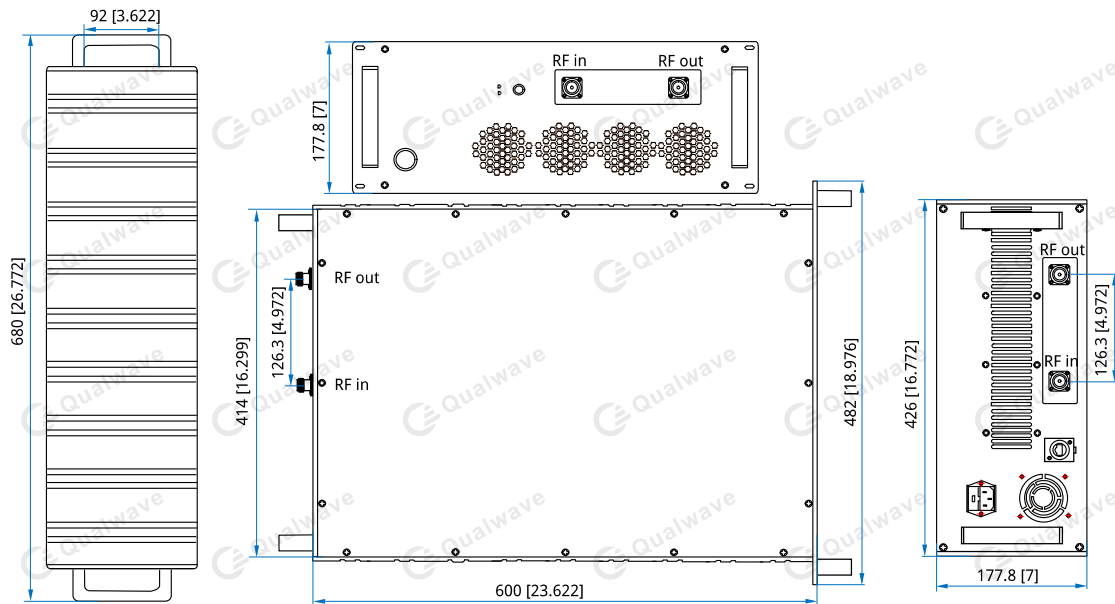
Mechanical

Size*1:	600*426*177.8mm 23.622*16.772*7in
Output Connector:	7/16 DIN (L29) male

[1] Exclude connectors and handle.

Environmental

Operating Temperature: -25~+55°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Note: The front panel is painted gray white, and the body is oxidized silver.

How To Order

QSMPG-2400-2500-60S

Customization is available upon request.