

QPS8-40-8000-A

SP8T, 0.04~8GHz, Absorptive

Features:
 * Low Insertion Loss
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.04~8GHz
Insertion Loss:	3.7dB max.
Isolation:	60dB min.
VSWR:	1.7 max.
Input Power:	+30dBm max.
Voltage/Current:	+5V@380mA max. -5V@50mA max.
Control:	TTL High - 1 TTL Low/NC - 0
Impedance:	50Ω

Mechanical


Size ^{*1} :	104*24*10.2mm 4.094*0.945*0.402in
Switching Time:	100ns max.
RF Connectors:	SMP Male
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	10-M2.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

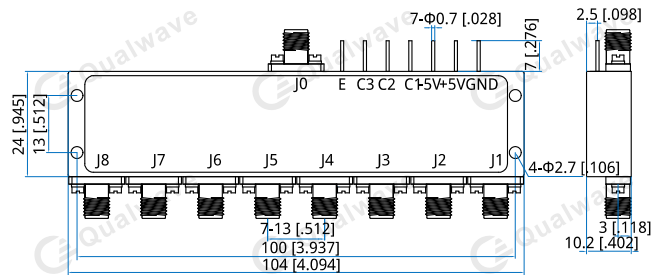

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Control True Table

E	C3	C2	C1	Connection
1	X	X	X	
0	0	0	0	J0 - J1 On
0	0	0	1	J0 - J2 On
0	0	1	0	J0 - J3 On
0	0	1	1	J0 - J4 On
0	1	0	0	J0 - J5 On
0	1	0	1	J0 - J6 On
0	1	1	0	J0 - J7 On
0	1	1	1	J0 - J8 On

X= DO NOT CARE

How To Order

[QPS8-40-8000-A](#)

Customization is available upon request.