

# QWCSD-42-S

DPDT, DC~26.5GHz, WR-42, SMA

**Features:**

- \* Low VSWR
- \* Low Insertion Loss
- \* High Isolation

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency(Coaxial):	DC~18GHz
Frequency(Waveguide):	18~26.5GHz
Current:	1.2A@24V DC
Voltage:	24±2V DC
Impedance:	50Ω

**Coaxial Switch**

Frequency range (GHz)	Insertion Loss (dB Max.)	Isolation (dB min.)	VSWR (Max.)
DC-1	0.05	80	1.1
1-2	0.1	70	1.15
2-6.5	0.25	60	1.25
6.5-11	0.3	60	1.3
11-15	0.35	50	1.35
15-18	0.5	50	1.5

**Waveguide Switch**

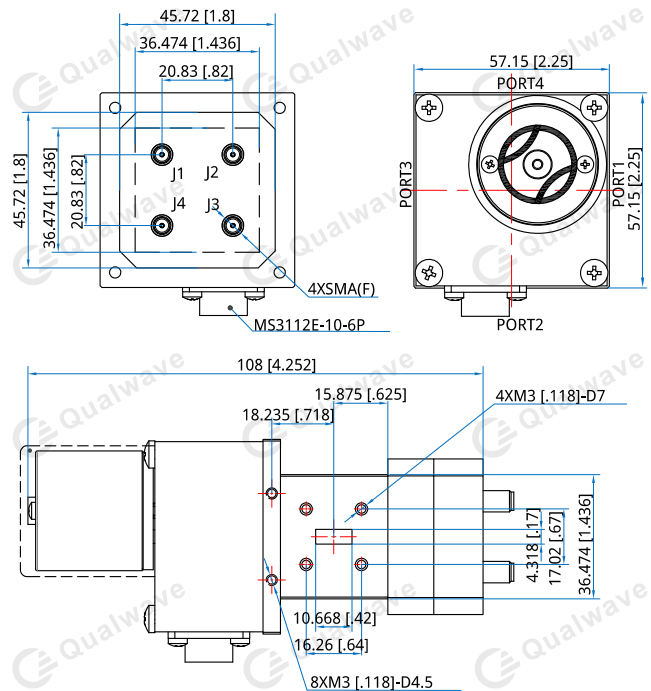
Frequency range (GHz)	Insertion Loss (dB Max.)	Isolation (dB min.)	VSWR (Max.)
18-26.5	0.1	60	1.1

**Mechanical**

Coaxial Switch Interface:	SMA
Waveguide Switch Interface:	WR-42
Switching Time:	80mS
Operation Life:	0.1M Cycles

**Environmental**

Operating Temperature:	-40~+85°C
Extended Temperature:	-55~+85°C
Non-operating temperature:	-55~+105°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**Additional Options**

TTL: T

Indicators: I

Extended Temperature: Z

**How To Order**
**QWCSD-42-S-XYZ**

S: RF Connectors. SMA: S.

X: Voltage. +15V: F, +24V: K.

Y: Interface Circular connector:2.

Z: Additional Options.

**Examples:**

To order a Waveguide Coaxial Switch, DPDT, WR42, SMA, +24V, TTL, Indicators, specify QWCSD-42-S-K2IT.

Customization is available upon request.

## Pin Numbering

Pin	Function	Pin	Function
A	VDC	D	Indicator1
B	GND	E	Indicator (COM)
C	VDC	F	Indicator2

## Control Logic

Position	A	B	C	RF Working Condition	Indicator status
POS 1	VDC	GND	NC	PORT1-PORT2 ON PORT3-PORT4 ON	J1-J2 ON J3-J4 ON D-E ON F-E OPEN
POS 2	NC	GND	VDC	PORT1-PORT4 ON PORT3-PORT2 ON	J1-J4 ON J3-J2 ON D-E OPEN F-E ON

## Driving Schematic Diagram

