

# QWSS-28-160-C-1-1

## WR-28

Features:  
 \* Low VSWR  
 \* High Isolation

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency: 26.3~40GHz  
 VSWR: 1.1 max.  
 Insertion Loss: 0.2dB max.  
 Average Power: 200W  
 Peak Power: 8KW


### Mechanical

Interface: WR-28 (BJ320)  
 Flange: FBP320  
 Length: 160mm  
 Material: Copper  
 Surface Treatment: Silver plated  
 Coating: Black paint

### Environmental

Operating Temperature: -20~+50°C  
 Non-operating Temperature: -40~+60°C

### Outline Drawings

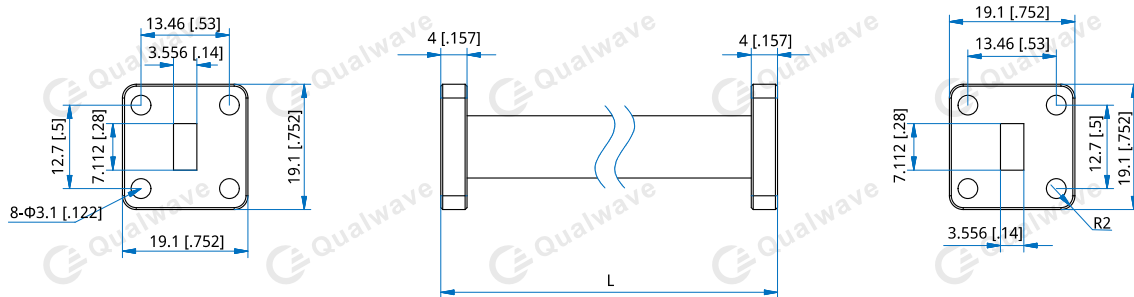

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QWSS-28-160-C-1-1**

Customization is available upon request.