

# QWSS-75

## WR-75

**Features:**

- \* Low VSWR
- \* High Isolation

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

---

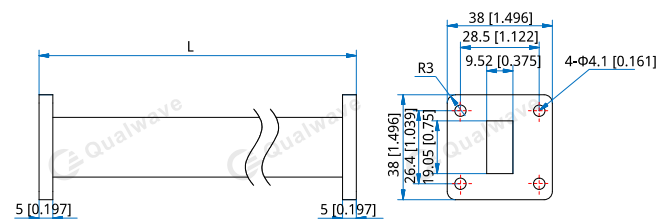
**Electrical**

Frequency:	9.84~15GHz
VSWR:	1.05 max.
Insertion Loss:	0.25dB/m

---

**Mechanical**

Interface:	WR-75 (BJ120)
Flange:	FBP120
Length:	100~3000mm
Material:	Aluminium
Surface Treatment:	Conductive oxidation
Coating:	Black paint

**Outline Drawings**


Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

**How To Order**
**QWSS-75-X-Y-Z**

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:

100 - 100mm

200 - 200mm

500 - 500mm

Material naming rules:

A - Aluminum

Flange naming rules:

1 - FBP

Examples:

To order a waveguide straight section, WR-75, 100mm, Aluminum, FBP120, specify QWSS-75-100-A-1.

Customization is available upon request.