

# QWSS-D750-100-A-8-H

## WRD-750, 100mm, Bulk Head

Features:  
 \* Low VSWR  
 \* High Isolation

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar


### Electrical

Frequency: 7.5~18GHz  
 VSWR: 1.1 max.  
 Insertion Loss: 0.1dB max.

### Mechanical

Interface: WRD-750  
 Flange: FPWRD750  
 Material: Aluminum  
 Finish: Conductive oxidation  
 Coating: Black paint

### Outline Drawings

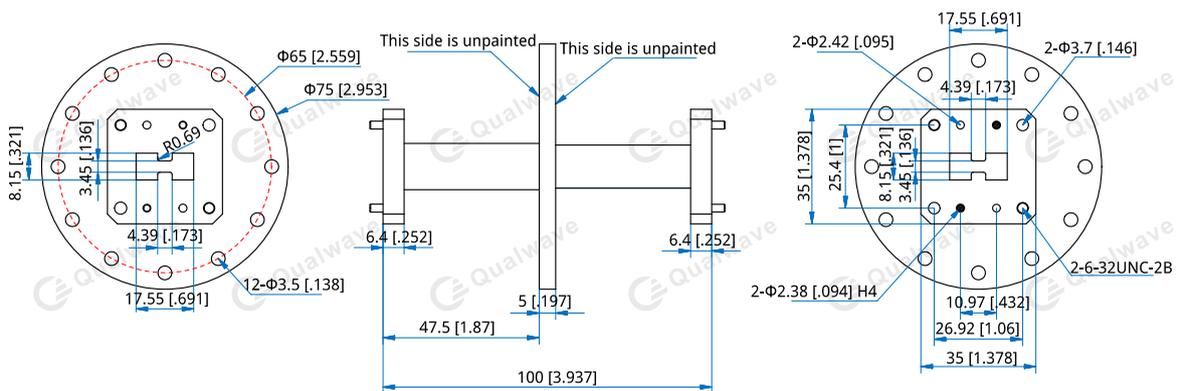

Unit: mm [in]  
 Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

### How To Order

**QWSS-D750-100-A-8-H**

Customization is available upon request.