

QWCA-D200-7

WRD-200 to 7/16 DIN (L29)

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 2~4.8GHz
VSWR: 1.25 max.
Average Power: 1000W

Mechanical

Coax Connectors: 7/16 DIN (L29)
Waveguide Size: WRD-200
Flange: FPWRD200
Material: Aluminium

How To Order

QWCA-D200-X-Y-Z

X: Connector type.

Y: Configuration type.

Z: Flange type if applicable.

Connector naming rules:

7 - 7/16 DIN (L29) Male (Outline A)

7F - 7/16 DIN (L29) Female (Outline A)

Configuration naming rules:

E - End launch

R - Right angle (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Examples:


To order a waveguide to coax adapter, WR-D200 to 7/16 DIN (L29) female, right angle, FPWRD, specify QWCA-D200-7F-R-8.

Customization is available upon request.

Environmental

Operating Temperature: -70~+165°C

Outline Drawings

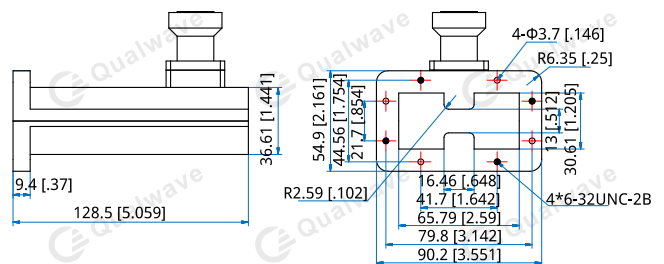

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]