

QWCA-D200-N

WRD-200 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2~6GHz 2~4.8GHz (Outline B)
VSWR:	1.3 max. 1.25 max.@2~4.8GHz (Outline A)

Mechanical

Coax Connectors:	N
Waveguide Size:	WRD-200
Flange:	FPWRD200
Material:	Aluminium

How To Order

QWCA-D200-X-Y-Z

X: Connector type.

Y: Configuration type.

Z: Flange type if applicable.

Connector naming rules:

N - N Male (Outline A, B)

NF - N Female (Outline A, B)

Configuration naming rules:

E - End launch (Outline B)

R - Right angle (Outline A)

Flange naming rules:

8 - FPWRD (Outline A, B)

Examples:


To order a waveguide to coax adapter, WR-D200 to N female, right angle, FPWRD, specify QWCA-D200-NF-R-8.

Customization is available upon request.

Environmental

Operating Temperature: -70~+165°C

Outline Drawings

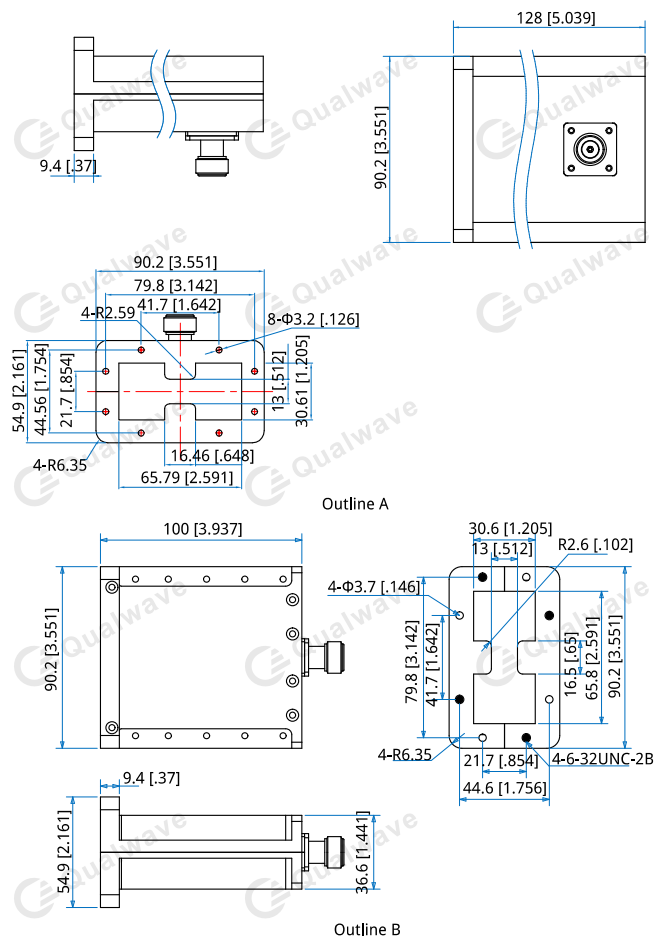

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]