

QTW-D750

WRD-750

Features:
 * Low VSWR
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar


Electrical

Frequency: 7.5~18GHz
 VSWR: 1.25 max.

Mechanical

Size: 152.4*35*35mm
 6*1.378*1.378in
 Waveguide Size: WRD-750
 Flange: FPWRD750
 Material: Copper
 Finish: Silver plating
 Coating: Sea gray

Outline Drawings

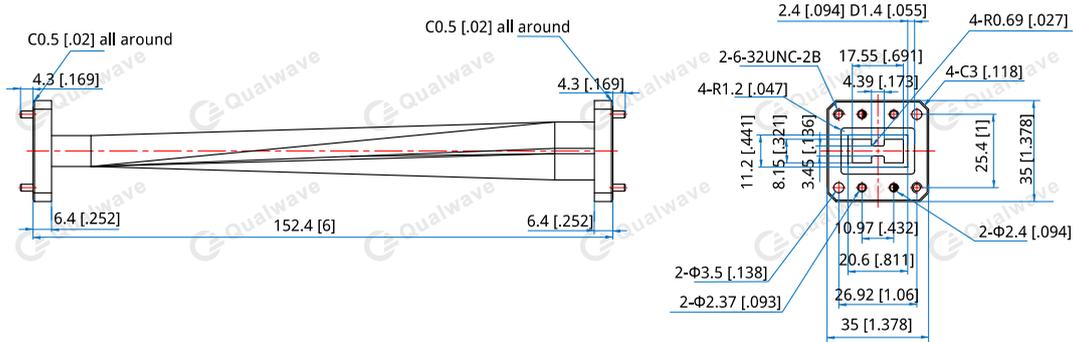

Outline A

Unit: mm [in]
 Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QTW-D750-X-Y-Z

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:
 152.4 - 152.4mm (Outline A)

Material naming rules:
 C - Copper (Outline A)

Flange naming rules:
 8 - FPWRD (Outline A)

Examples:
 To order a Waveguide Twist, WRD-750, 152.4mm, Copper, FPWRD750, specify QTW-D750-152.4-C-8.

Customization is available upon request.