

QWVA-2.2-B-7

WR-2.2, Brass, UG387/U

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

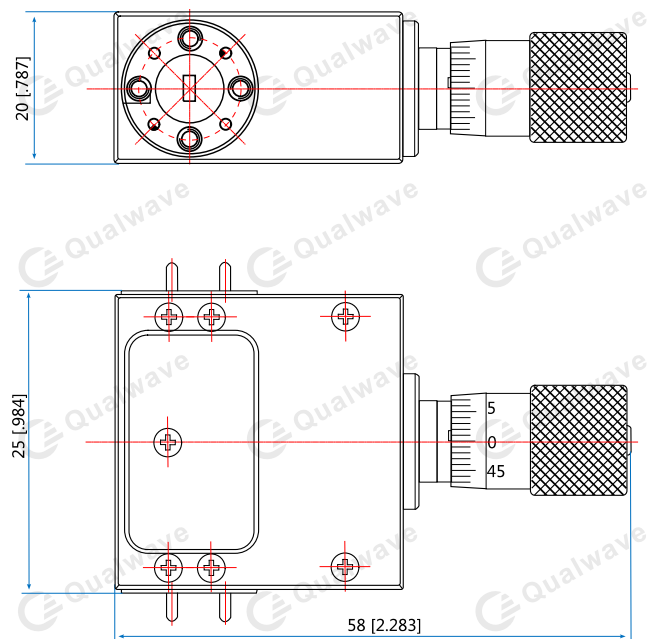
Frequency:	325~500GHz
VSWR:	1.4 max.
Attenuation:	0~40dB
Insertion Loss:	2.5dB max.

Mechanical

Size:	58*25*20mm 2.283*0.984*0.787in
Waveguide Size:	WR-2.2
Flange:	UG387/U
Material:	Brass

Environmental

Operating Temperature:	-20~+70°C
Non-operating Temperature:	-40~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.012 in]

How To Order

QWVA-2.2-B-7

Customization is available upon request.