

## QWVA-3.4-B-6

WR-3.4, Brass, UG385/U

**Features:**

- \* Low VSWR
- \* High Attenuation Flatness

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

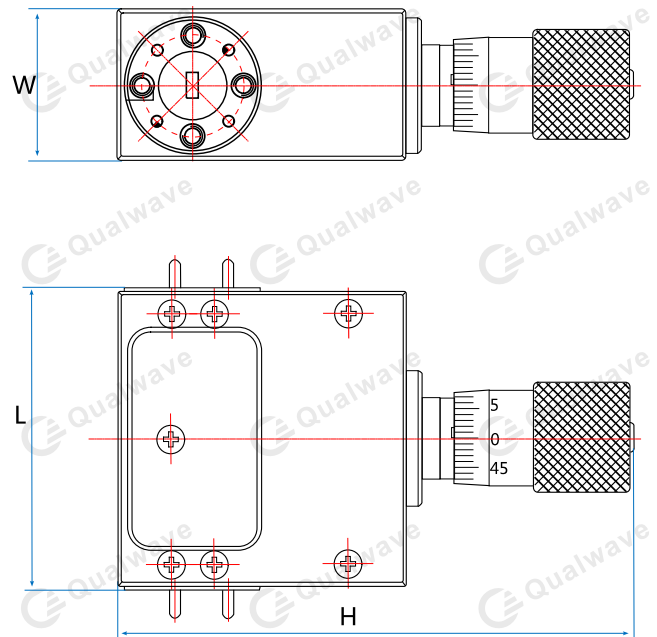
Frequency:	220~325GHz
VSWR:	1.3 max.
Attenuation:	0~30dB
Insertion Loss:	2dB max.
Handing Power:	0.5W

**Mechanical**

Size:	H*W*Lmm 61*21*22mm 2.402*0.827*0.866in
Waveguide Size:	WR-3.4
Flange:	UG385/U
Material:	Brass

**Environmental**

Operating Temperature:	-20~+70°C
Non-operating Temperature:	-40~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance:  $\pm 0.5$ mm [ $\pm 0.012$ in]

**How To Order**

**QWVA-3.4-B-6**

Customization is available upon request.