

QE-0-18000-SSM-5

DC~18GHz, 5dB

Features: Applications:

* Low VSWR * Amplifier

* Small Size * Laboratory Test

* Instrumentation

Electrical

Frequency: DC~18GHz
VSWR: 1.8 typ.
Slope: 5dB typ.
Linearity: ±1dB typ.

Insertion Loss: 1.8dB@18GHz max.

6.5@0.5GHz min.

Absolute Maximum Ratings*1

RF Input Power: +20dBm

[1] Permanent damage may occur if any of these limits are exceeded.

Mechanical

Size*2: 16*15*9.5mm

0.63*0.591*0.374in

Connectors: SMA

Mounting: 2-Φ1.7mm through-hole


[2] Exclude connectors.

How To Order

QE-0-18000-SSM-5

Customization is available upon request.

Outline Drawings

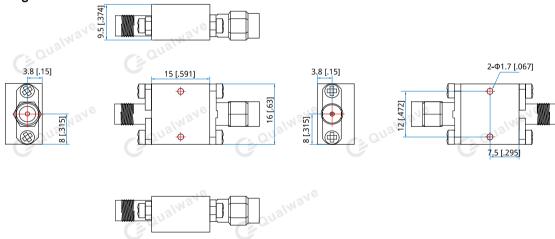

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]