

QPD8-6000-10000-K15-NS

8-Way, 6~10GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	6~10GHz
Insertion Loss ^{*1} :	1dB max.
VSWR:	1.8 max.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±10° max.
Impedance:	50Ω
Power @SUM Port:	150W max. as divider 150W max. as combiner

[1] Excluding theoretical loss 9dB.

Mechanical

Size ^{*2} :	116*72.5*21mm 4.567*2.854*0.827in
Connectors:	N Female SMA Female
Mounting:	4-Φ3mm through-hole


[2] Exclude connectors.

How To Order

QPD8-6000-10000-K15-NS

Customization is available upon request.

Outline Drawings

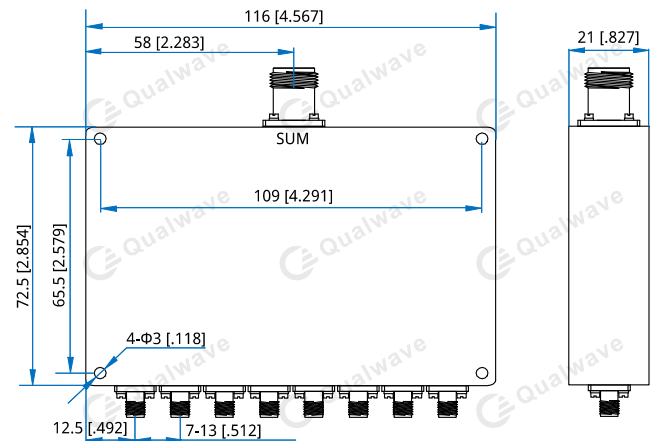

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]