



# QLAS-8000-18000-38-15

8~18GHz, 38dB, 1.5dB

Features: Applications:

\* Broadband \* Wireless

\* Low Noise \* Receiver

\* Laboratory Test



#### Electrical

Frequency: 8~18GHz
Gain: 38dB typ.
Gain Flatness: ±1.5dB typ.

\* Radar

Output Power (P1dB): 18dBm typ.
Noise Figure: 1.5dB typ.

 $\begin{array}{ccc} \text{Spurious:} & -60 \text{dBc max.} \\ \text{VSWR:} & 1.6 \text{ typ.} \\ \text{Voltage:} & +85 \text{\sim} +265 \text{V AC} \\ \text{Current:} & 200 \text{mA typ.} \\ \\ \text{Impedance:} & 50 \Omega \\ \end{array}$ 

## Absolute Maximum Ratings\*1

RF Input Power: +20dBm

[1] Permanent damage may occur if any of these limits are exceeded.

#### Mechanical

Size\*2: 136\*186\*52mm

5.354\*7.323\*2.047in

RF Connectors: SMA Female [2] Exclude connectors, rack mount brackets, handles.

#### **Environmental**


Operating Temperature:  $-20\sim+50^{\circ}$ C Non-operating Temperature:  $-40\sim+85^{\circ}$ C

#### **How To Order**

QLAS-8000-18000-38-15

Customization is available upon request.

### **Outline Drawings**

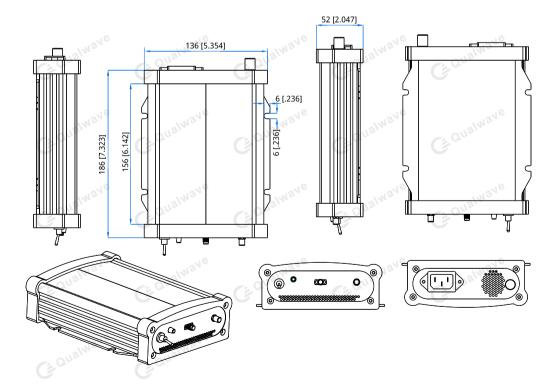

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]