

QRHA8

90~140GHz, WR-8

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 90~140GHz
Gain: 15dB min.
VSWR: 1.5 max.

Mechanical

Waveguide size: WR-8
Flange: UG387/U

How To Order

QRHA8-X-Y-Z

X: Gain in dB

Y: Connector type if applicable


Z: Installation method if applicable

Examples:

To order an antenna, 90~140GHz, 15dB, WR-8, specify QRHA8-15.

Customization is available upon request.

Outline Drawings

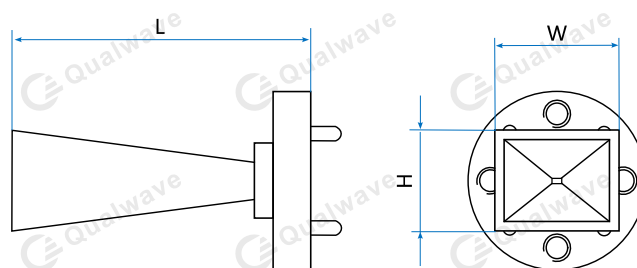

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

Length (mm/in)

L	W	H
62 [2.441]	23 [0.906]	18 [0.709]