

QLA-2000-8000-23-13

2~8GHz, 23dB, 1.3dB

Features:
 * Broadband
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar



Electrical

Frequency:	2~8GHz
Small Signal Gain:	23dB typ.
Gain Flatness:	±1dB typ.
Output Power (P1dB):	13dBm typ.
Noise Figure:	1.3dB typ.
Spurious:	-60dBc max.
Input VSWR:	1.4 typ.
Output VSWR:	1.45 typ.
Voltage:	+5V DC (Outline A) +6~15V DC (Outline B)
Current:	200mA typ.
Impedance:	50Ω

Absolute Maximum Ratings*1

RF Input Power:	+20dBm
Voltage:	+7V (Outline A) +20V (Outline B)

[1] Permanent damage may occur if any of these limits are exceeded.


Mechanical

RF Connectors: SMA Female


Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

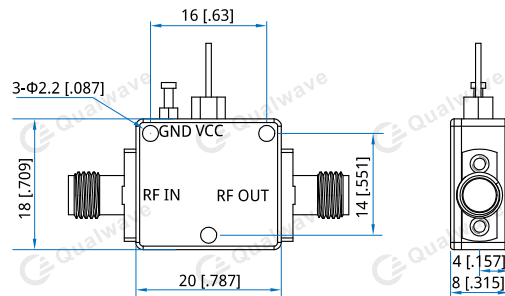

Outline A

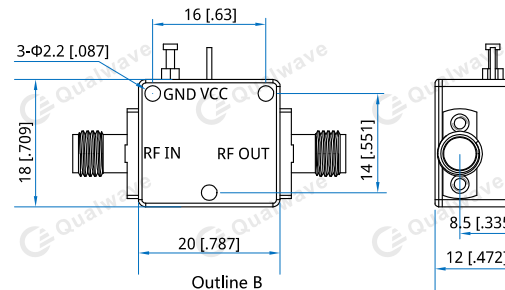

Outline B

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]


How To Order

QLA-2000-8000-23-13 - Outline A
 QLA-2000-8000-23-13-1 - Outline B


Customization is available upon request.

Typical Performance Curves


Input VSWR vs. Frequency

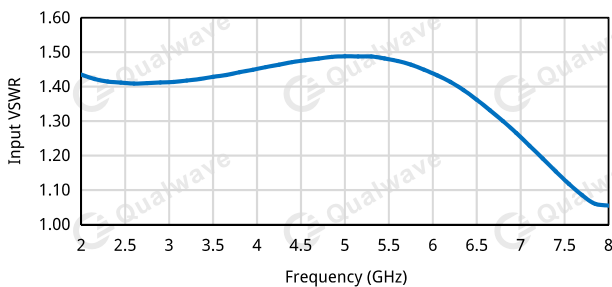


Output VSWR vs. Frequency

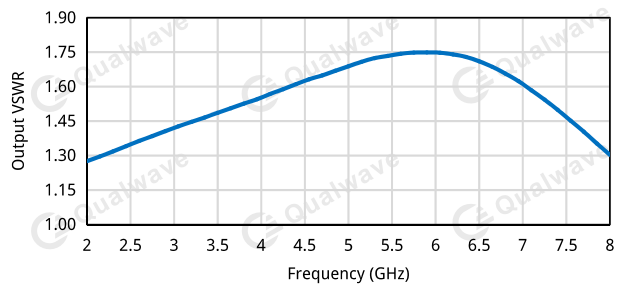


Gain vs. Frequency

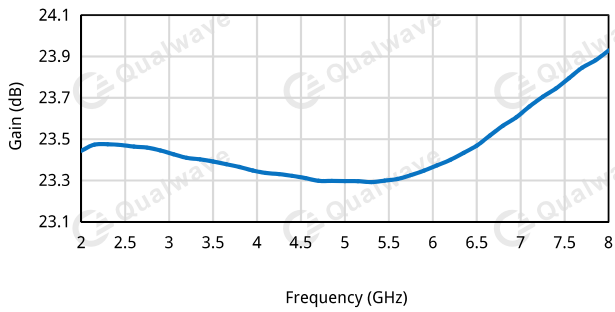

Isolation vs. Frequency

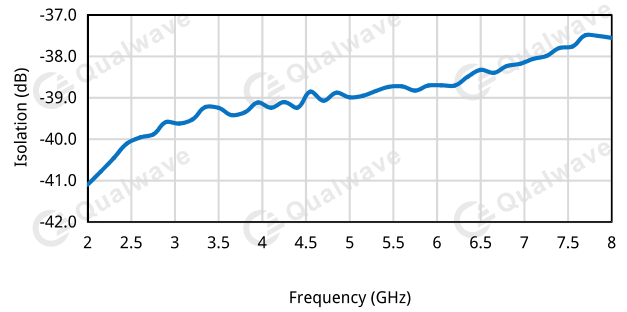

P1dB vs. Frequency

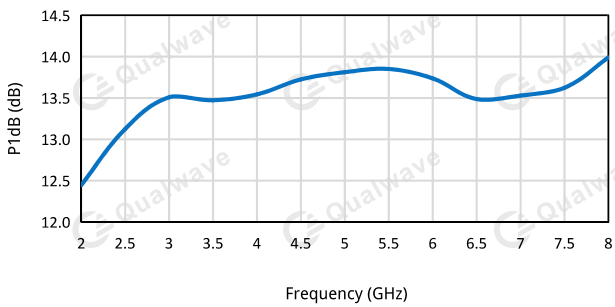

Noise Figure vs. Frequency

