

QSDC-2000-18000-K12

2~18GHz, 120W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~18GHz
Directivity:	10dB min.
Impedance:	50Ω
Average Power:	120W max.
Peak Power:	3000W max.

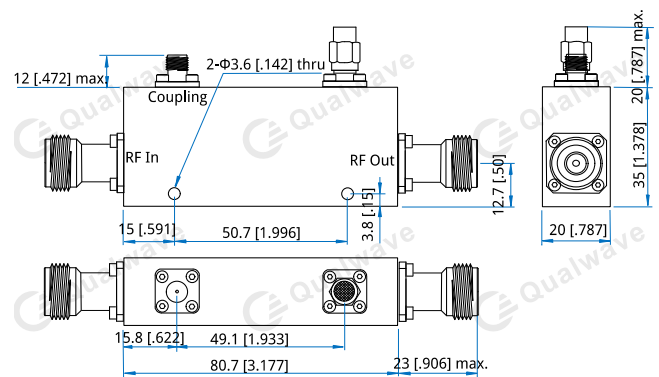
Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (±dB max.)
30±1	0.6	1.6	0.8
40±1	0.6	1.6	0.8

Mechanical

RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	2-Φ3.6mm through-hole

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings


Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

QSDC-2000-18000-K12-X-Y

X: Coupling (30, 40dB)

Y: Connector type

Connector naming rules:

NS - N female & SMA female

Examples:

To order a single directional coupler, 2~18GHz, 120W, 30dB, N female & SMA female, specify QSDC-2000-18000-K12-30-NS.

Customization is available upon request.