

QPS4-50-18000-A

SP4T, 0.05~18GHz, Absorptive

Features:
 * Low Insertion Loss
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.05~18GHz
Insertion Loss:	5.5dB max.
Isolation:	60dB min.
VSWR:	2 max.
Input Power:	27dBm max.
Voltage/Current:	+5V±0.5V @200mA max. -5V±0.5V @50mA max.
Control:	TTL High - 1 TTL Low/NC - 0
Impedance:	50Ω

Mechanical


Size ^{*1} :	52*20*10.2mm 2.047*0.787*0.402in
Switching Time:	200ns max.
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Nickel plated aluminum
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

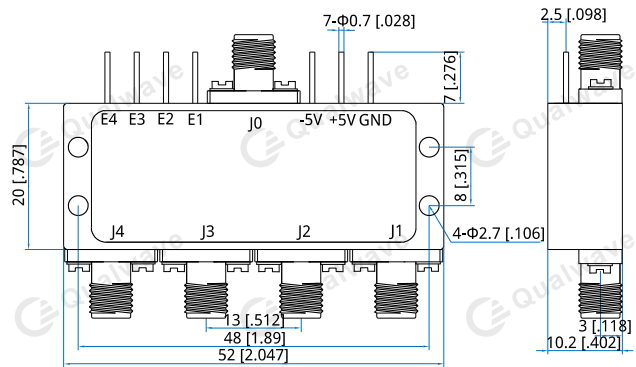

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Control True Table

E4	E3	E2	E1	Connection
1	1	1	0	J0 - J1 On
1	1	0	1	J0 - J2 On
1	0	1	1	J0 - J3 On
0	1	1	1	J0 - J4 On

How To Order

[QPS4-50-18000-A](#)

Customization is available upon request.