

QPD8-26500-67000-12-V

8-Way, 26.5~67GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	26.5~67GHz
Insertion Loss ^{*1} :	4.9dB max.
Input VSWR:	1.9 max.
Output VSWR:	1.9 max.
Isolation:	16dB min.
Amplitude Balance:	±0.9dB max.
Phase Balance:	±12° max.
Impedance:	50Ω
Power @SUM Port:	12W max. as divider 1W max. as combiner

[1] Excluding theoretical loss 9.0dB.

Mechanical


Size ^{*2} :	30*103.7*12.7mm 1.181*4.083*0.5in
Connectors:	1.85mm Female
Mounting:	4-Φ2.6mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

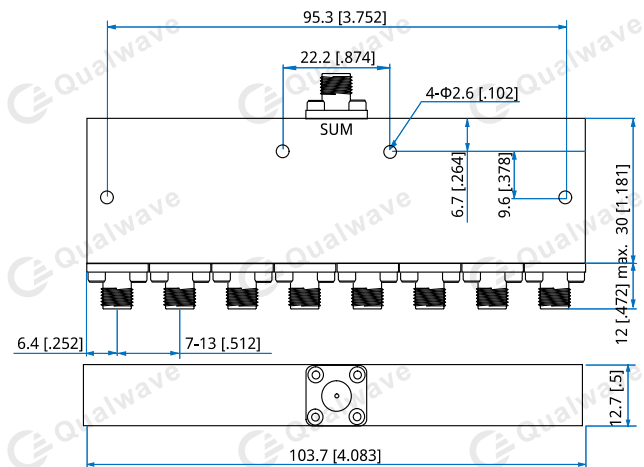

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-26500-67000-12-V

Customization is available upon request.