

QCN-MCB-RG400-1

N Male Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	1000V DC
Impedance:	50 Ω


Mechanical

RF Connector:	N male crimp
Mating Cable:	RG400
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

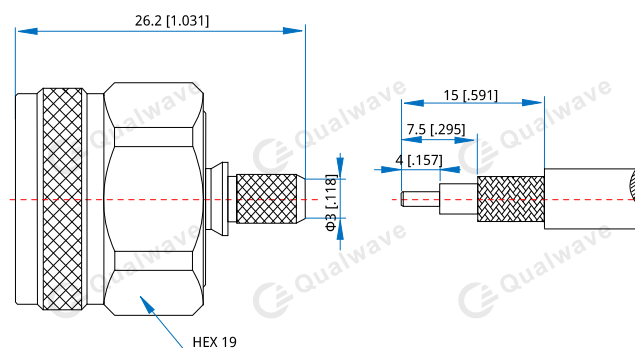

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QCN-MCB-RG400-1

Customization is available upon request.