

QASP1

SMA to SMP Max

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~6GHz
VSWR:	1.15 max. (Outline A)
Dielectric Withstanding Voltage:	1000V
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω


Mechanical

RF Connectors:	SMA SMP Max
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

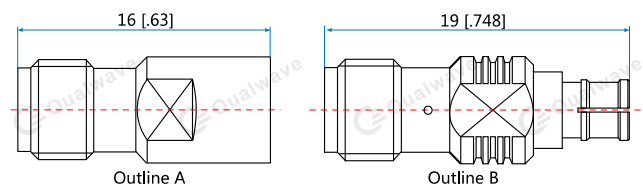

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QASP1-FM - SMA (f) to SMP Max (m), Outline A

QASP1-FF - SMA (f) to SMP Max (f), Outline B

Customization is available upon request.