

QE-18000-26500-S-15

18~26.5GHz, 15dB

Features:
 * Low VSWR
 * Small Size

Applications:
 * Amplifier
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	18~26.5GHz
Insertion Loss:	3dB max.
VSWR:	1.8 max.
Slope:	15dB typ. 18dB @18GHz 3dB @26.5GHz
Linearity:	±1.5dB max.
Power Handling:	23dBm typ.
Impedance:	50Ω

Mechanical


Size ^{*1} :	26*20*12mm 1.024*0.787*0.472in
Connectors:	SMA Female (Customizable)
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+65°C
No-operating Temperature:	-65~+125°C max.

Outline Drawings

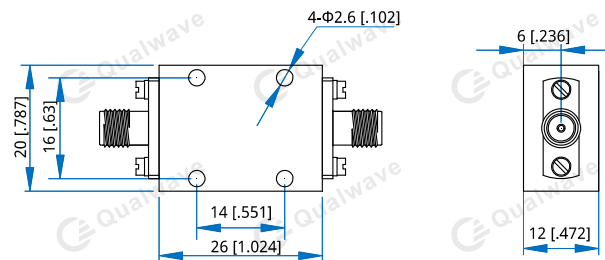

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QE-18000-26500-S-15

Customization is available upon request.