

QLAS-100-6000-16-10

0.1~6GHz, 16dB, 1.0dB

Features:
 * Broadband
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar



Electrical

Frequency:	0.1~6GHz
Gain:	16dB typ.
Gain Flatness:	±10dB typ.
Noise Figure:	1dB typ.
Output Power (P1dB):	20dBm typ.
VSWR:	2 typ.
Voltage:	+85~+265V AC
Impedance:	50Ω

Mechanical

Size*2:	136*186*52mm 5.354*7.323*2.047in
RF Connectors:	SMA Female

[2] Exclude connectors, rack mount brackets, handles.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Absolute Maximum Ratings*1

RF Input Power:	+22dBm
-----------------	--------


[1] Permanent damage may occur if any of these limits are exceeded.

How To Order

QLAS-100-6000-16-10

Customization is available upon request.

Outline Drawings

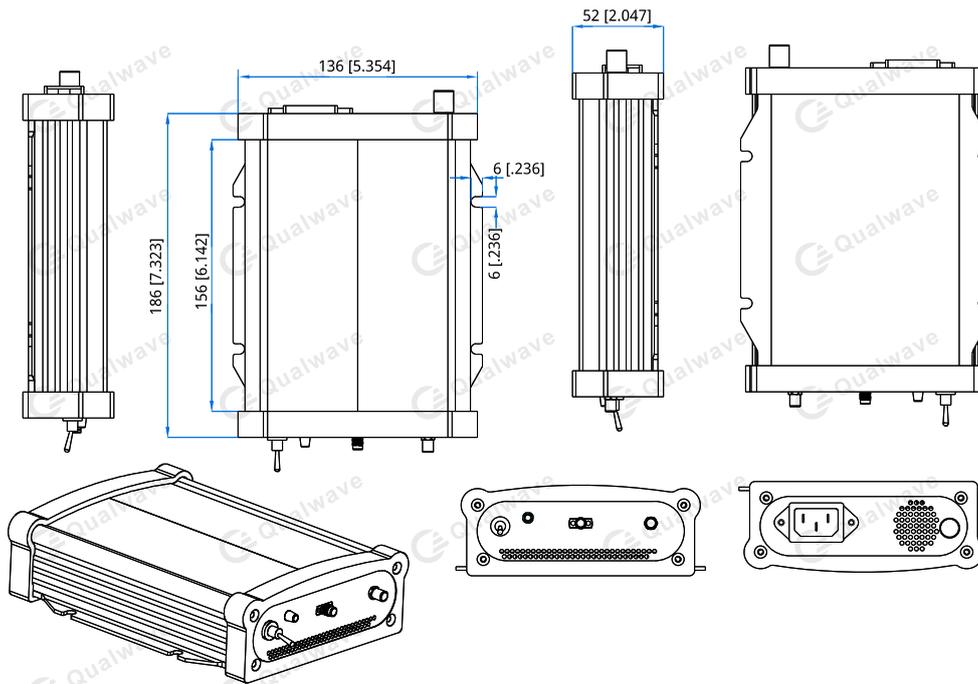

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]