


QLA-4000-12000-54-15

4~12GHz, 54dB, 1.5dB

Features:
 * Broadband
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar



Electrical

Frequency:	4~12GHz
Gain:	54dB typ.
Gain Flatness:	±1dB typ.
Output Power (P1dB):	17dBm typ.
Noise Figure:	1.5dB typ.
Spurious:	-60dBc max.
Reverse Isolation:	-50dB typ.
VSWR:	2 typ.
Voltage:	+5V DC (Outline A) +6~15V DC (Outline B)
Current:	200mA typ.
Impedance:	50Ω

Absolute Maximum Ratings*1

RF Input Power:	+20dBm
Voltage:	+7V (Outline A) +20V (Outline B)

[1] Permanent damage may occur if any of these limits are exceeded.

Mechanical

RF Connectors: SMA Female (Removable)

How To Order

QLA-4000-12000-54-15 - Outline A


QLA-4000-12000-54-15-1 - Outline B

Customization is available upon request.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

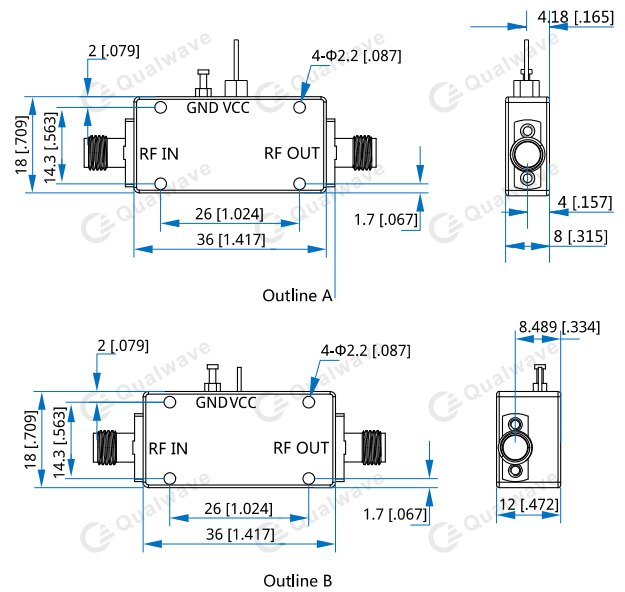


Unit: mm [in]


Tolerance: ±0.2mm [±0.008in]

Typical Performance Curves


Input VSWR vs. Frequency

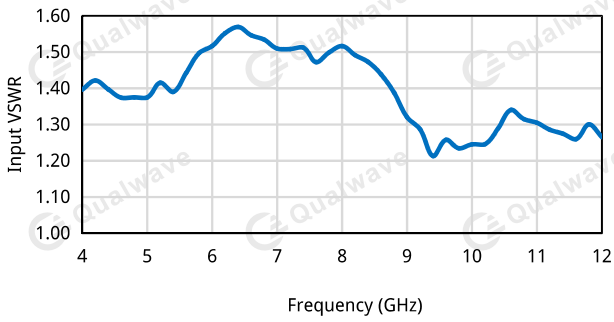


Output VSWR vs. Frequency

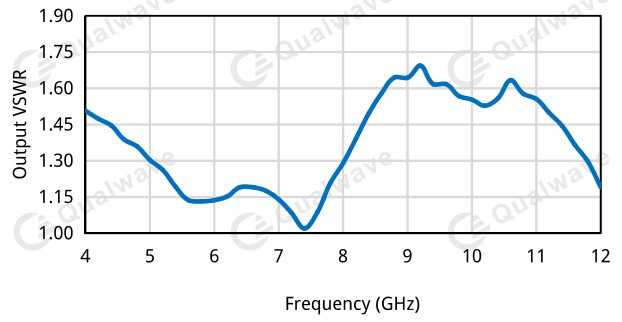


Gain vs. Frequency

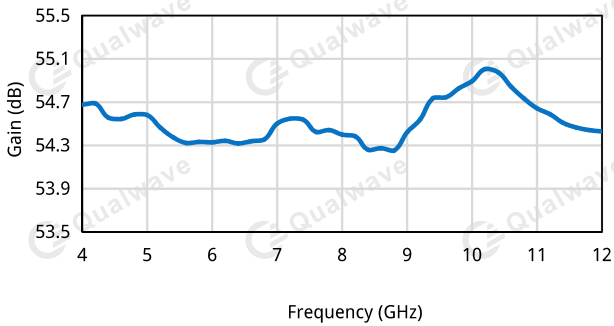

Isolation vs. Frequency

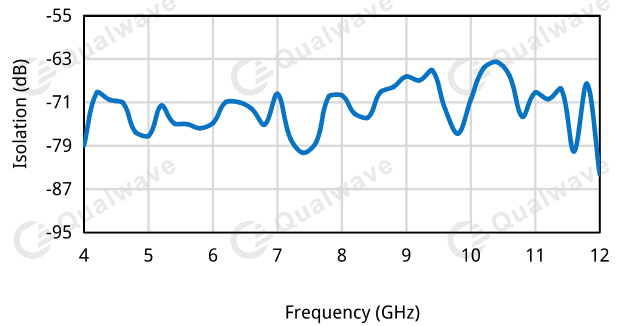

P1dB vs. Frequency

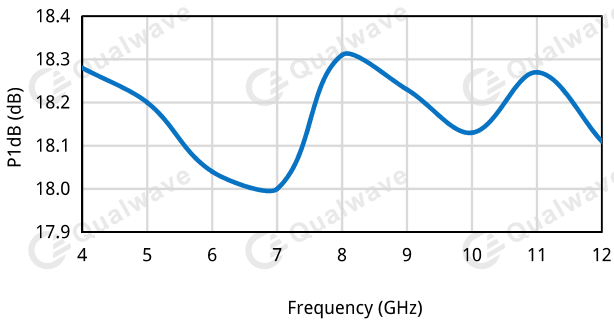

Noise Figure vs. Frequency

